



U.S. Patent and Trademark Office

JCT 586 U.S. PTO
02/29/00Please type a plus sign (+) inside this box → Approved for use through 09/30/2000. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No.	BANIK 2-73	
First Inventor or Application Identifier		Somnath Banik
Title	SYSTEM AND METHOD FOR COMMUNICATING DATA OVER A RADIO FREQUENCY VOICE CHANNEL	
	Express Mail Label No. EL176030552US	

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. * Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing)
2. Specification [Total Pages 21]
(preferred arrangement set forth below)
 - Descriptive title of the Invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to Microfiche Appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
3. Drawing(s) (35 U.S.C. 113) [Total Sheets 3]
4. Oath or Declaration [Total Pages 6]
 - a. Newly executed (original or copy)
 - b. Copy from a prior application (37 C.F.R. § 1.63(d))
(for continuation/divisional with Box 16 completed)
 - i. DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

***NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).**

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

5. Microfiche Computer Program (Appendix)
6. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
 - a. Computer Readable Copy
 - b. Paper Copy (identical to computer copy)
 - c. Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

7. Assignment Papers (cover sheet & document(s))
37 C.F.R. § 3.73(b) Statement Power of
(when there is an assignee) Attorney
8. English Translation Document (if applicable)
9. Information Disclosure Statement (IDS)/PTO-1449 Copies of IDS
Statement (IDS)/PTO-1449 Citations
10. Preliminary Amendment
11. Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
12. * Small Entity Statement(s) Statement filed in prior application,
(PTO/SB/09-12) Status still proper and desired
13. Certified Copy of Priority Document(s)
(if foreign priority is claimed)
14. Other:
15.
16.

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

Continuation Divisional Continuation-in-part (CIP) of prior application No: _____

Prior application information: Examiner _____

Group / Art Unit: _____

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS

<input type="checkbox"/> Customer Number or Bar Code Label		(Insert Customer No. or Attach bar code label here)			or <input checked="" type="checkbox"/> Correspondence address below
Name	David H. Hitt				
	Hitt Chwang & Gaines, P.C.				
Address	P.O. Box 832570				
City	Richardson	State	Texas	Zip Code	75083
Country		Telephone	(972) 480-8800	Fax	(972) 480-8865

Name (Print/Type)	David H. Hitt	Registration No. (Attorney/Agent)	33,182
Signature			Date 02/29/00

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

JC586 U.S. PTO
09/514489

02/29/00

**SYSTEM AND METHOD FOR COMMUNICATING DATA
OVER A RADIO FREQUENCY VOICE CHANNEL**

Inventors: Somnath Banik
 1074 North Hedge Row Drive
 Allentown, Pennsylvania 18103

James A. Johanson
6336 Larch Circle
Macungie, Pennsylvania 18062

Assignee: Lucent Technologies Inc.
 600 Mountain Avenue
 Murray Hill, New Jersey 07974-0636

CERTIFICATE OF EXPRESS MAIL

I hereby certify that this correspondence, including the attachments listed, is being deposited with the United States Postal Service, Express Mail - Post Office to Addressee, Receipt No. EL176030552 US, in an envelope addressed to Commissioner of Patents and Trademarks, Washington, D.C. 20231, on the date shown below.

2/29/00 GLENDA L. WILLIS
Date of Mailing Type or printed name of person mailing
Glenda L. Willis
Signature of person mailing

Hitt Chwang & Gaines, P.C.
225 University Plaza
275 West Campbell Road
Richardson, Texas 75080
972-480-8800

**SYSTEM AND METHOD FOR COMMUNICATING DATA
OVER A RADIO FREQUENCY VOICE CHANNEL**

TECHNICAL FIELD OF THE INVENTION

The present invention is directed, in general, to a communication system and, more specifically, to a system and method of sending data over a voice channel.

BACKGROUND OF THE INVENTION

DRAFT - DRAFT - DRAFT - DRAFT - DRAFT -

15

The telecommunications industry continues to seek ways to accommodate and enhance services available to its customers. Telephone customers are moving, with ever-increasing speed, toward a collection of wireless solutions as they expect their communication capabilities to become less restrictive and tied to devices that are constrained to use wire to function. A popular solution is a portable telephone, typically made up of a base station connected to telephone wiring and a portable handset wirelessly communicates with the base station to allow a user freedom of movement within some radius of the base station. The portable telephone offers a user "airtime" limited only by the

endurance of the handset battery. This "airtime" is free to the user, who pays only for the wired connection.

The basic service provided includes voice traffic as with any normal telephone service. Another service that may be available is
5 caller identification, which allows the caller's name and telephone number to be displayed on a handset display for observation by the user. Typically, the caller identification is data made available before a call is answered. The caller identification typically does not interfere with the voice traffic since it occurs before the voice traffic starts. Another service that may be provided is caller identification for a call that is waiting, that is, call-waiting caller identification. This data occurs during voice traffic and does interfere with the voice traffic by blanking or overwriting the voice traffic with the data to be displayed.

A steady stream of call-waiting caller identification data may significantly degrade the quality of the voice traffic making it difficult to continue a conversation. This is particularly true when a large data set needs to be transferred such as the case of refreshing the handset display. A portable telephone user may also
20 want to use the handset display for a collection of other data or as a menu to select desired data. This data may encompass data from a private database or data that is available in the public sector, such as the Internet. Transferring large amounts of data

or repetitively transferring smaller amounts of data will reduce the overall quality of the voice traffic.

Accordingly, what is needed in the art is a way to accommodate a collection of data over a portable phone without affecting the
5 voice traffic on the phone.

SUMMARY OF THE INVENTION

To address the above-discussed deficiencies of the prior art, the present invention provides a system or method for communicating data over a voice channel between a transmitter and a receiver. In 5 one embodiment, the system includes: (1) a silence detector, coupled to the transmitter, that identifies a pause in voice traffic that is to be transmitted over the voice channel and generates an interjection signal during the pause and (2) a data injector, coupled to the silence detector, that receives the interjection signal and responds by causing the transmitter to transmit data to the receiver over the voice channel.

The present invention therefore introduces the broad concept of sending packets of data during pauses or periods of silence that occur during voice interchanges. The present invention enjoys substantial utility in that it makes efficient use of the communication channel and eliminates possible distortions in the voice transmission that may occur if data and voice are superimposed. This is particularly true if large amounts of data must be transferred, such as the data that may be needed to refresh 15 a display, such as a liquid crystal display (LCD).

In one embodiment of the present invention, the voice traffic is analog voice traffic. Analog voice traffic is perhaps the most

common form of voice traffic and, by virtue of the nature of speech, typically affords ample time to inject digital forms of data. Those skilled in the pertinent art will understand that digital voice traffic may also be used to inject other data not related to voice, as well.

In one embodiment of the present invention, the transmitter is associated with a base station of a cordless telephone and the receiver is associated with a handset of the cordless telephone. Those skilled in the pertinent art are familiar with other applications wherein data may be advantageously interposed with voice transmissions.

In one embodiment of the present invention, the data comprises caller identification data. Caller identification data is a particularly advantageous form of data to blend with voice traffic. Of course, one skilled in the pertinent art will understand that many other forms of data may also be used.

In one embodiment of the present invention, the data comprises menu item selection data. Menu item selection data is particularly advantageous in that it allows a recipient to efficiently respond to a suite of choices that may be selected to match a particular context associated with a voice traffic situation. Of course, the menu items may also be of a general nature having broader application.

In one embodiment of the present invention, the transmitter transmits the voice traffic in frames. The transmission of voice in frames allows for the prediction of periods of silence, which may be denoted as "silence frames" that would be used to 5 incorporate data. Those skilled in the pertinent art are familiar with such frame structures pertaining to voice and data as well.

10
15
20

In one embodiment of the present invention, the silence detector identifies the pause by comparing a peak energy of the voice traffic to a noise floor reference. Of course, many other ways of identifying pauses in a voice conversation are well within the scope of the present invention.

20

The foregoing has outlined, rather broadly, preferred and alternative features of the present invention so that those skilled in the art may better understand the detailed description of the invention that follows. Additional features of the invention will be described hereinafter that form the subject of the claims of the invention. Those skilled in the art should appreciate that they can readily use the disclosed conception and specific embodiment as a basis for designing or modifying other structures for carrying out the same purposes of the present invention. Those skilled in the art should also realize that such equivalent constructions do not depart from the spirit and scope of the invention in its broadest form.

BRIEF DESCRIPTION OF THE DRAWINGS

For a more complete understanding of the present invention, reference is now made to the following descriptions taken in conjunction with the accompanying drawings, in which:

5 FIGURE 1 illustrates a pictorial diagram of a cordless telephone constructed according to the principles of the present invention;

10 FIGURE 2 illustrates a block diagram of a data system associated with the cordless telephone of FIGURE 1 showing additional functional detail; and

FIGURE 3, illustrates a flow diagram of a method carried out according to the principles of the present invention.

DETAILED DESCRIPTION

Referring initially to FIGURE 1. Illustrated is a pictorial diagram of a cordless telephone 100 constructed according to the principles of the present invention. The cordless telephone 100 includes a base station transceiver 110 and a handset transceiver 120. The base station transceiver 110 is connected to a telephone line 115 and includes a base station antenna 111 and a handset cradle 112. The handset transceiver 120 includes a handset antenna 121, a receiving transducer 122, a sending transducer 123, a touch tone keypad 124 and a data display 125.

The base station antenna 111 transmits both voice and data information to the handset antenna 121. The handset antenna 121 receives the information and presents the voice information to the receiving transducer 122 and the data information to the data display 125. The handset antenna 121 typically transmits voice and data information to the base station antenna 111, which receives the voice information and presents it to the telephone line 115. The received data information from the touch tone keypad 124 is typically used to establish an initial call by the user of the handset transceiver 120, but may also be used to request other information as appropriate to the call.

The present invention provides a system or method for communicating data over a voice channel between a transmitter and a receiver, such as the base station transceiver 110 and the handset transceiver 120. In the illustrated embodiment, the system identifies a pause in voice traffic that is to be transmitted over the voice channel and generates an interjection signal during the pause. The injection signal then causes the transmitter to transmit data to the receiver over the voice channel. In this embodiment, the voice traffic is analog voice traffic. Analog voice traffic is a common form of voice traffic and typically affords ample time during a conversation to inject digital forms of data. Those skilled in the pertinent art will understand that digital voice traffic may also be used to inject other data not related to voice, as well. Although associated with the base station 110 in the illustrated embodiment, there are other applications wherein data may be advantageously interposed with voice transmissions.

In the illustrated embodiment, the data comprises caller identification data. Caller identification data is a particularly advantageous form of data to blend with voice traffic. Sending caller identification data during pauses in voice traffic allows the voice information to appear to be uninterrupted, thereby greatly reducing the probability of misunderstanding in the voice

communication. Of course, one skilled in the pertinent art will understand that many other forms of data may also be used.

The data may also include menu item selection data. Menu item selection data is particularly advantageous in that it allows a recipient to efficiently respond to a suite of choices that may be selected to match a particular context associated with a voice traffic situation. Alternately, the menu items may also be of a general nature having broader application.

Turning now to FIGURE 2, illustrated is a block diagram of a data system 200 associated with the cordless telephone 100 of FIGURE 1 showing additional functional detail. In the illustrated embodiment, a data transmitter system 210 is associated with the base station 110 and a data receiver system 220 is associated with the handset 120 of the cordless telephone 100. The data system 200 does not illustrate all of the functions associated with the cordless telephone 100, but rather an embodiment of those functions that are pertinent to the present invention.

The data transmitter system 210 includes a base station antenna 211, a transmitter/receiver 212, a telephone line interface 213, a silence detector 214, a data register 215 and a data injector 216. Voice and data information are accepted from the phone lines by the interface 213. Voice information is presented to the transmitter/receiver 212 for transmission to the handset 120

in the regular manner via the base station antenna 211. Data information is routed to the data register 215, for holding, from the interface 213 until it is appropriate for it to be transmitted to the data receiver system 220. The silence detector 214, coupled 5 to the transmitter/receiver 212, identifies a pause in voice traffic and generates an interjection signal during the pause. This interjection signal enables the data injector 216 during this pause, causing the transmitter/receiver 212 to transmit data to the data receiver system 220 over the voice channel.

10
15
20

The data receiver system 220 includes a handset antenna 221, a receiver/transmitter 222, a data detector 223 and a data display 225. Voice information is received by the handset antenna 221 and processed in a normal fashion. Data information is also received from the data transmitter system 210 through the handset antenna 221 by the receiver/transmitter 222, then presented to the data detector 223 for detecting and decoding before the data is displayed in the data display 225 for user observation.

The data information may include a variety of caller identification information and formats. Additionally, the data 20 information may include any collection that may be pertinent to the user, including private or confidential information from a database. The data information may also be publicly available, such as that from the Internet. The user may also request

information by using menu selection options presented by the data display 225.

In the illustrated embodiment, the transmitter/receiver 212 transmits the voice traffic in frames, thereby virtually guaranteeing periods of silence and advantageously assuring that these periods are predictable in duration. Such periods of silence may be denoted as silence frames wherein data may be incorporated. In other embodiments not using voice traffic in frames, these periods of silence still exist but are typically less predictable in occurrence. The silence detector 214 may use several techniques to identify the pause in voice traffic, such as an average energy measurement or a peak energy measurement. In the illustrated embodiment, by comparing a peak energy of the voice traffic to a noise floor reference, the pause in voice traffic is confirmed. Of course, other ways of identifying pauses in a voice conversation are well within the scope of the present invention.

Turning now to FIGURE 3, illustrated is a flow diagram of a method 300 carried out according to the principles of the present invention. The method 300 starts in a step 305 wherein both voice and data information are desired to be communicated between a transmitter and a receiver. The data information is to be sent without appearing to interrupt or overwrite the voice information,

which is analog voice traffic. In the illustrated embodiment, the method 300 is applied only if data information is available.

In this embodiment, the transmitter receives information from the phone lines in a step 310. The information received in the 5 step 310 is then monitored as to whether it is voice or data in a step 315. Data information is buffered and a pause in voice traffic is also identified in the step 315. The data information may be caller identification or a menu item selection as pertinent to the particular application.

10 In a first decision point denoted "Silence Frames ?" in a step 320, the decision is made as to whether there is a pause in the voice information indicating a silence frame. If the decision is YES and a pause in voice information has been identified, the data information is injected into an interstice in the voice information in a step 325. Then, in a step 330, the data information is transmitted to the receiver for display. Silence frames are typically marked or tracked so that the handset knows not to play them in its associated speaker. Additionally, if there is no data 15 available to be sent, the transmitter and receiver function normally, as noted above. If the decision is NO in the first decision point denoted "Silence Frames ?" in the step 320 (indicating no pause in the voice traffic), the voice information is transmitted to the receiver in the step 330. The method 300

continues in this manner until all voice and data information has been transmitted to the receiver, at which point the method 300 ends in a step 335.

From the above, it is apparent that the present invention introduces the broad concept of sending packets of data during pauses or periods of silence that occur during voice interchanges. This approach has substantial utility in making efficient use of the communication channel without introducing distortions in the voice transmission that would otherwise occur were data and voice to be superimposed. This is particularly true if large amounts of data must be transferred, such as the data that may be needed to refresh a liquid crystal display (LCD).

Although the present invention has been described in detail, those skilled in the art should understand that they can make various changes, substitutions and alterations herein without departing from the spirit and scope of the invention in its broadest form.

WHAT IS CLAIMED IS:

1. For use in communicating data over a voice channel
2 between a transmitter and a receiver, a system comprising:

3 a silence detector, coupled to said transmitter, that
4 identifies a pause in voice traffic that is to be transmitted over
5 said voice channel and generates an interjection signal during said
6 pause; and

7 a data injector, coupled to said silence detector, that
8 receives said interjection signal and responds by causing said
9 transmitter to transmit data to said receiver over said voice
10 channel.

11
12 2. The system as recited in Claim 1 wherein said voice
13 traffic is analog voice traffic.

14
15 3. The system as recited in Claim 1 wherein said transmitter
16 is associated with a base station of a cordless telephone and said
17 receiver is associated with a handset of said cordless telephone.

18
19 4. The system as recited in Claim 1 wherein said data
20 comprises caller identification data.

5. The system as recited in Claim 1 wherein said data
2 comprises menu item selection data.

6. The system as recited in Claim 1 wherein said transmitter
2 transmits said voice traffic in frames.

7. The system as recited in Claim 1 wherein said silence
2 detector identifies said pause by comparing a peak energy of said
3 voice traffic to a noise floor reference.

8. A method of communicating data over a voice channel
2 between a transmitter and a receiver, comprising:

3 identifying a pause in voice traffic that is to be transmitted
4 over said voice channel; and

5 responding to said pause by causing said transmitter to
6 transmit data to said receiver over said voice channel.

9. The method as recited in Claim 8 wherein said voice
2 traffic is analog voice traffic.

10. The method as recited in Claim 8 wherein said transmitter
2 is associated with a base station of a cordless telephone and said
3 receiver is associated with a handset of said cordless telephone.

11. The method as recited in Claim 8 wherein said data
2 comprises caller identification data.

12. The method as recited in Claim 8 wherein said data
2 comprises menu item selection data.

13. The method as recited in Claim 8 wherein said transmitter
2 transmits said voice traffic in frames.

14. The method as recited in Claim 8 wherein said identifying
2 comprises comparing a peak energy of said voice traffic to a noise
3 floor reference.

15. A cordless telephone, comprising:

2 a base station transceiver;

3 a handset transceiver, said base station and handset
4 transceivers cooperable to establish a voice channel therebetween;

5 a silence detector, coupled to said base station transceiver,
6 that identifies a pause in voice traffic that is to be transmitted
7 over said voice channel and generates an interjection signal during
8 said pause; and

9 a data injector, coupled to said silence detector, that
10 receives said interjection signal and responds by causing said base
11 station transceiver to transmit data to said receiver over said
12 voice channel.

16. The cordless telephone as recited in Claim 15 wherein
said voice traffic is analog voice traffic.

17. The cordless telephone as recited in Claim 15 wherein
2 said data comprises caller identification data.

18. The cordless telephone as recited in Claim 15 wherein
2 said data comprises menu item selection data.

19. The cordless telephone as recited in Claim 15 wherein
2 said base station transceiver transmits said voice traffic in
3 frames.

20. The cordless telephone as recited in Claim 15 wherein
said silence detector identifies said pause by comparing a peak
energy of said voice traffic to a noise floor reference.

**SYSTEM AND METHOD FOR COMMUNICATING DATA
OVER A RADIO FREQUENCY VOICE CHANNEL**

ABSTRACT OF THE DISCLOSURE

A system or method for communicating data over a voice channel between a transmitter and a receiver. In one embodiment, the system includes: (1) a silence detector, coupled to the transmitter, that identifies a pause in voice traffic that is to be transmitted over the voice channel and generates an interjection signal during the pause and (2) a data injector, coupled to the silence detector, that receives the interjection signal and responds by causing the transmitter to transmit data to the receiver over the voice channel.

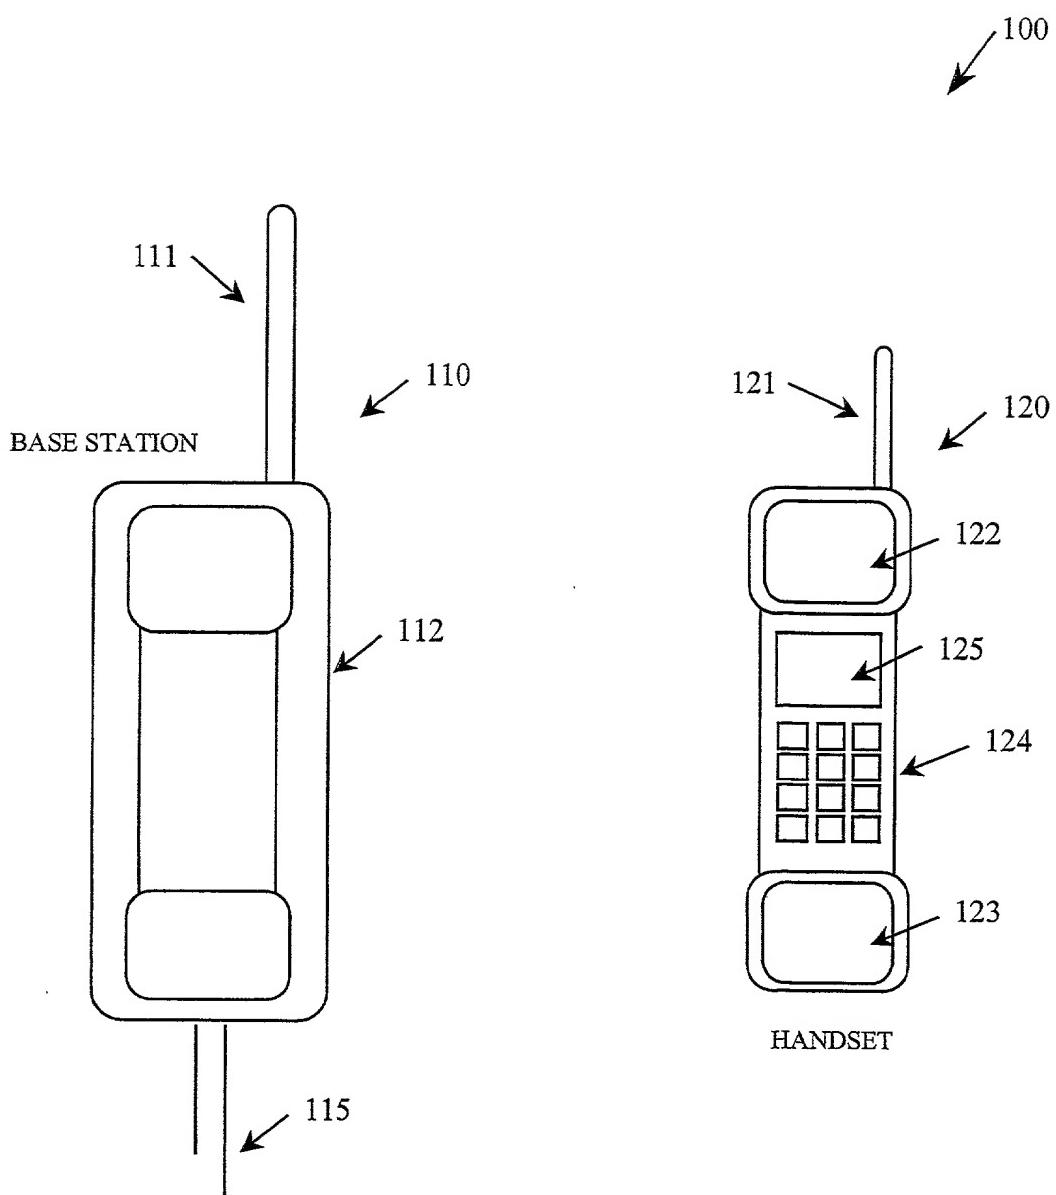


FIGURE 1

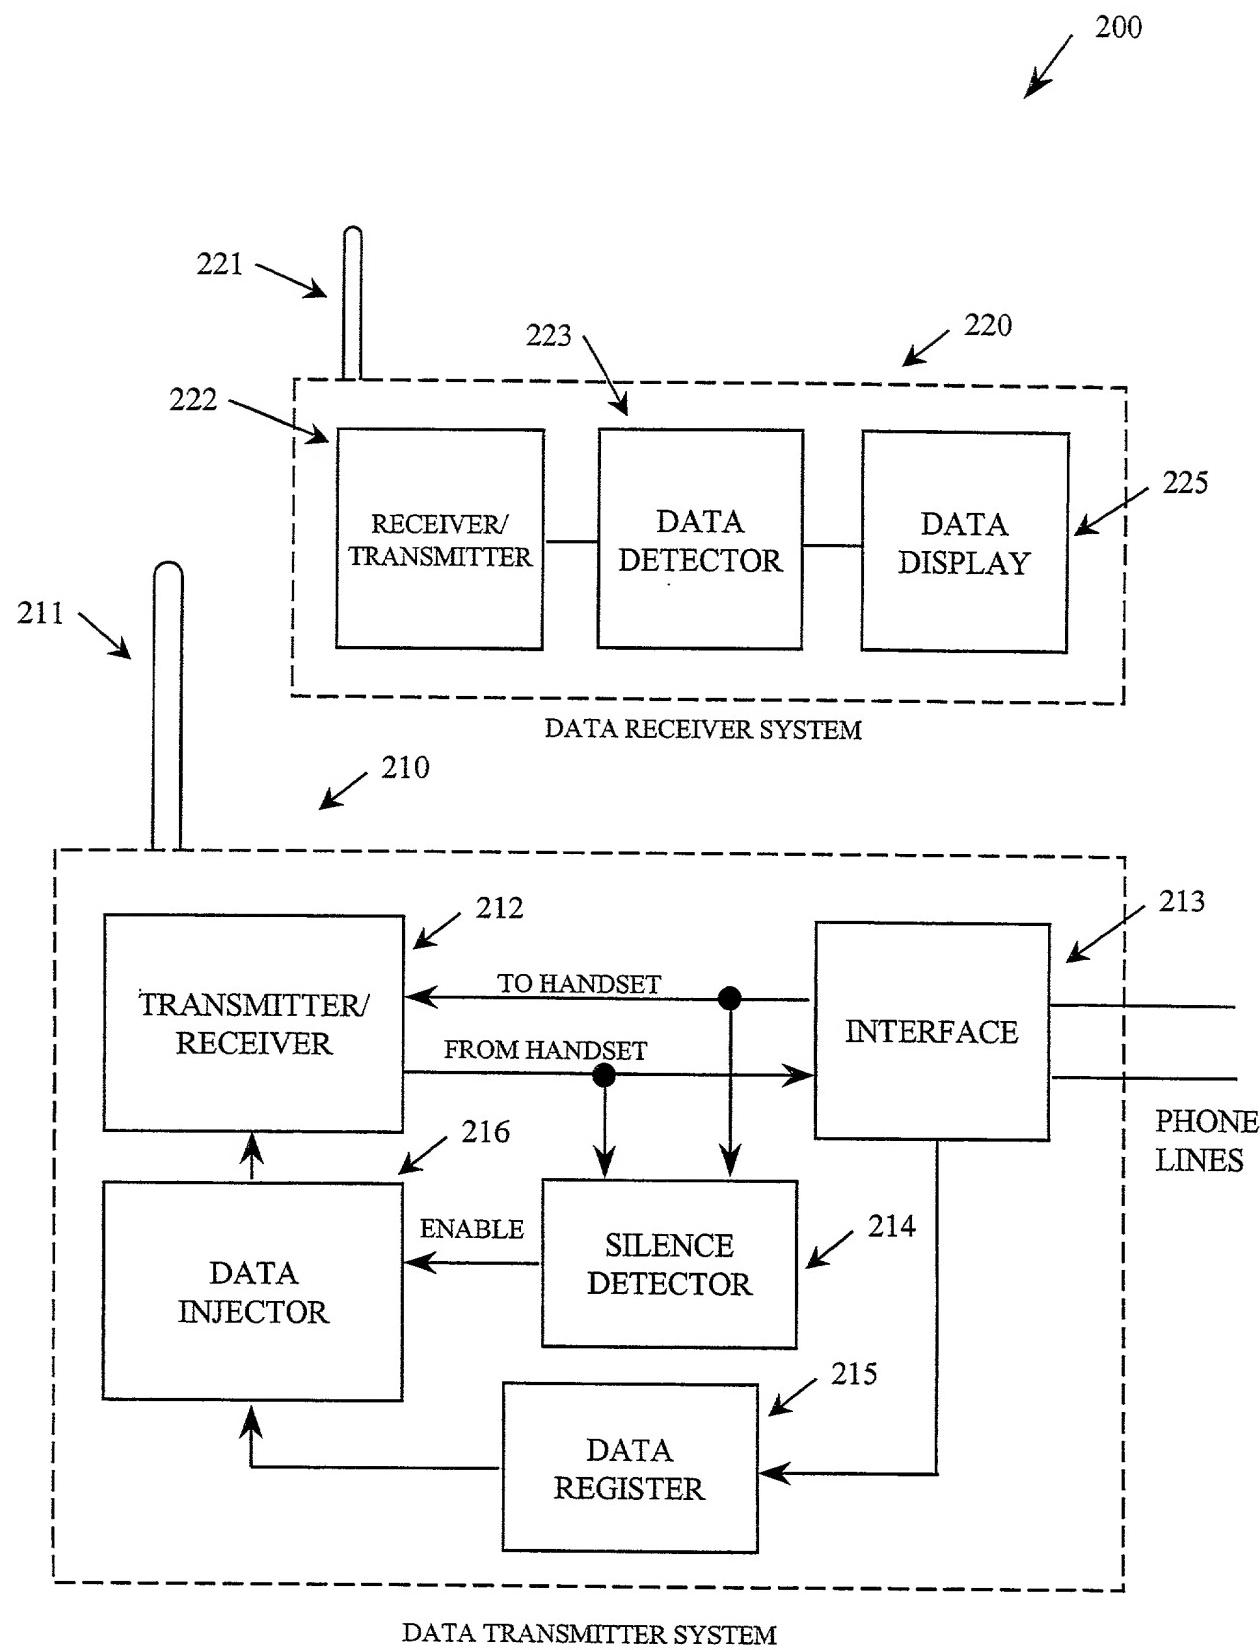


FIGURE 2

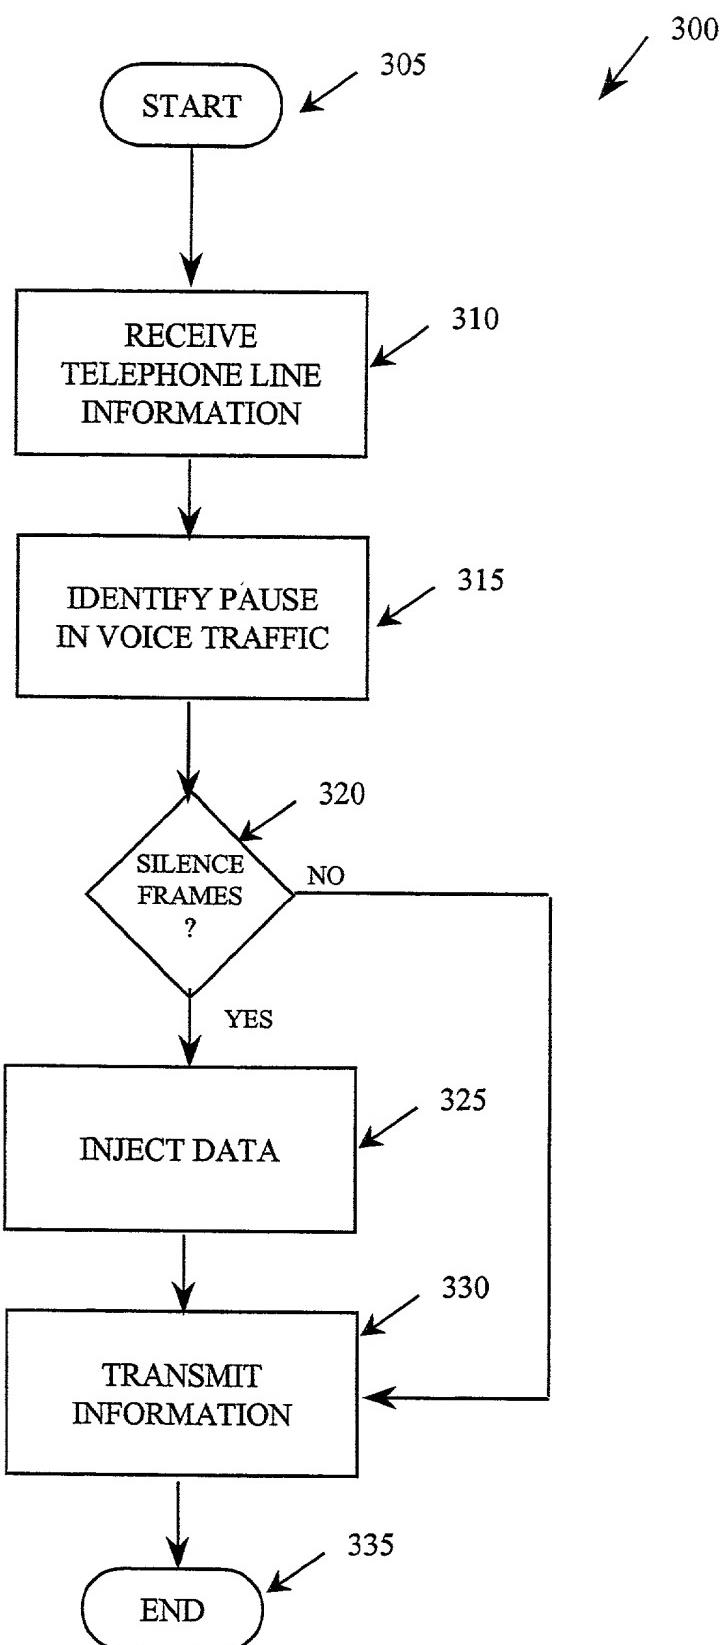


FIGURE 3

**IN THE UNITED STATES
PATENT AND TRADEMARK OFFICE**

Declaration and Power of Attorney

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am an original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled "SYSTEM AND METHOD FOR COMMUNICATING DATA OVER A RADIO FREQUENCY VOICE CHANNEL," the specification of which is attached hereto.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment, if any, specifically referred to in this oath or declaration.

I acknowledge the duty to disclose to all information known to me which is material to the patentability as defined in Title 37, Code of Federal Regulations, § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

NUMBER	COUNTRY	DATE FILED	PRIORITY CLAIMED
	None		

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

US/PCT Serial Num	Date Filed	Status
None		

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

I hereby appoint the following attorney(s) with full power of substitution and revocation, to prosecute said application, to make alterations and amendments therein, to receive the patent, and to transact all business in the Patent and Trademark Office connected therewith:

Lester H. Birnbaum	(Reg. No. 25,830)
Richard J. Botos	(Reg. No. 32,016)
Jeffery L. Brosemer	(Reg. No. 36,096)
Kenneth M. Brown	(Reg. No. 37,590)
Craig J. Cox	(Reg. No. 39,643)
Donald P. Dinella	(Reg. No. 39,961)
Guy Eriksen	(Reg. No. 41,736)
Martin I. Finston	(Reg. No. 31,613)
William S. Francos	(Reg. No. 38,456)
Barry H. Feedman	(Reg. No. 26,166)
Julio A. Garceran	(Reg. No. 37,138)
Jimmy Goo	(Reg. No. 36,528)
Anthony Grillo	(Reg. No. 36,535)
Stephen M Gurey	(Reg. No. 27,336)
John M. Harman	(Reg. No. 38,173)
Matthew J. Hodulik	(Reg. No. 36,164)
Michael B. Johannessen	(Reg. No. 35,557)
Mark A. Kurisko	(Reg. No. 38,944)

Irena Lager	(Reg. No. 39,260)
John B. MacIntyre	(Reg. No. 41,170)
Christopher N. Malvone	(Reg. No. 34,866)
Scott W. McLellan	(Reg. No. 30,776)
Martin G. Meder	(Reg. No. 34,674)
John C. Moran	(Reg. No. 30,782)
Michael A. Morra	(Reg. No. 28,975)
Gregory J. Murgia	(Reg. No. 41,209)
Claude R. Narcisse	(Reg. No. 38,979)
Joseph J. Opalach	(Reg. No. 36,229)
Neil R. Ormos	(Reg. No. 35,309)
Eugen E. Pacher	(Reg. No. 29,964)
Jack R. Penrod	(Reg. No. 31,864)
Gregory C. Ranieri	(Reg. No. 29,695)
Scott J. Rittman	(Reg. No. 39,010)
Ferdinand M. Romano	(Reg. No. 32,752)
Eugene J. Rosenthal	(Reg. No. 36,658)
Bruce S. Schneider	(Reg. No. 27,949)
Ronald D. Slusky	(Reg. No. 26,585)
David L. Smith	(Reg. No. 30,592)
Ozer M.N. Teitelbaum	(Reg. No. 36,698)
John P. Veschi	(Reg. No. 39,058)
David Volejnicek	(Reg. No. 29,355)
Charles L. Warren	(Reg. No. 27,407)
Jeffrey M. Weinick	(Reg. No. 36,304)
Eli Weiss	(Reg. No. 17,765)

I hereby appoint the attorney(s) on ATTACHMENT A as associate attorney(s) in the aforementioned application, with full power solely to prosecute said application, to make alterations and amendments therein, to receive the patent, and to transact all business in the Patent and Trademark Office connected with the prosecution of said application. No other powers are granted to such associate attorney(s) and such associate attorney(s) are specifically denied any power of substitution or revocation.

Full name of first inventor: Somnath Banik


Inventor's signature: Somnath Banik Date: 2/28/2000

Residence: City of Allentown
County of Monmouth Lehigh
State of Pennsylvania

Citizenship: United States of America

Post Office Address: 1074 North Hedge Row Drive
Allentown, Pennsylvania 18103

Full name of second inventor: James A. Johanson

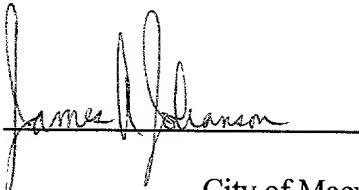Inventor's signature:  Date: 2/22/2000

Residence: City of Macungie
County of Lehigh
State of Pennsylvania

Citizenship: United States of America

Post Office Address: 6336 Larch Circle
Macungie, Pennsylvania 18062

ATTACHMENT A

Attorney Name(s):

David H. Hitt	Registration No. 33,182
T. Ling Chwang	Registration No. 33,590
Charles W. Gaines	Registration No. 36,804
Glenn W. Boisbrun	Registration No. 39,615
Tung T. Nguyen	Registration No. 42,935
Mark E. Kelley	Registration No. P45,857
Greg H. Parker	Registration No. 44,995

Telephone calls should be made to Mark E. Kelley of Hitt Chwang & Gaines, P.C. at:

Phone No.: (972) 480-8800
Fax No.: (972) 480-8865

All written communications are to be addressed to:

Mark E. Kelley
HITT CHWANG & GAINES, P.C.
275 West Campbell Road, Suite 225
Richardson, Texas 75080

Atty. Docket No.: BANIK 2-73